



(FR) Caniveaux de sol

- Réalisation en acier inox AISI 441.
- Avec cloche anti-odeurs.
- Grille supérieure soudée à mailles de 33x33 mm.
- Structure soudée.

(NL) Sterfput



- Vervaardigd uit roestvrij staal AISI 441.
- Met geurbestrijding.
- Gelast bovenrooster met 33x33 mm mazen.
- Gelaste structuur.

(DE) Bodenablauffrinnen



- Hergetellt aus Edelstahl AISI 441.
- Mit Anti-Geruchslocke.
- Geschweißtes oberes mit 33x33 mm Maschenweite.
- Geschweißte Struktur.



	mm	kg	m ³	
GS33	300x300xh130	11	0,6	609,00 EUR
GS44	400x400xh130	13	0,6	675,00 EUR

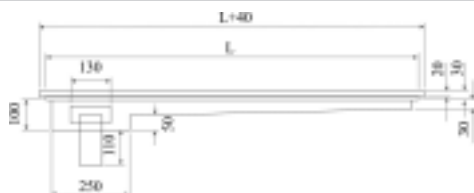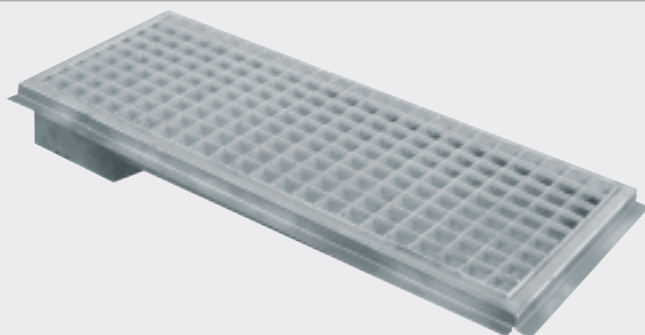

	mm	kg	m ³	
GS93G	900x300xh130	18	0,11	848,00 EUR
GS123G	1200x300xh130	21	0,15	972,00 EUR
GS153G	1500x300xh130	26	0,18	1 120,00 EUR

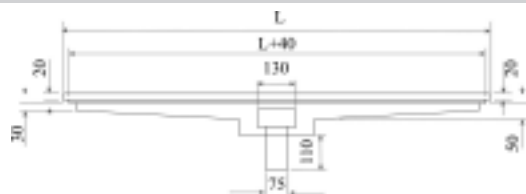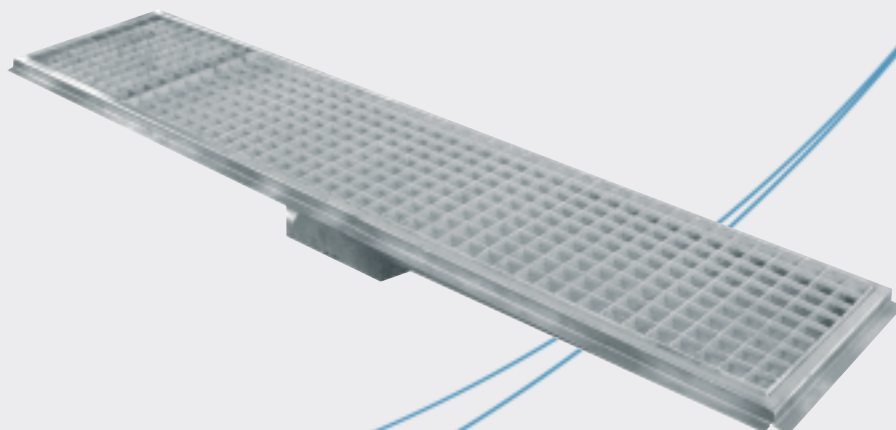

	mm	kg	m ³	
GS153C	1500x300xh130	26	0,18	1 574,00 EUR
GS213C	2100x300xh130	30	0,21	1 700,00 EUR
GS273C	2700x300xh130	36	0,24	2 081,00 EUR